
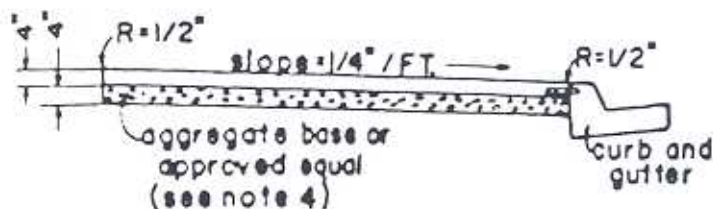


PLAN

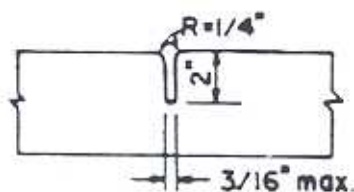

WEAKENED PLANE JOINT

SECTION A

NOTES:

1. Weakened plan joints shall be constructed at ends of curb returns, curb inlets, other structures and at 12' intervals except in driveway sections. Joints shall match adjacent improvements.
2. Concrete shall be class 'A' or an approved 3000psi mix with a light broom finish.
3. Score lines shall be 1/4" deep.
4. Aggregate base shall be 8" thick where constructing next to existing sidewalk or curbs without dowels.
6. Commercial sidewalk shall be constructed on both sides of the street.

REV	DATE	APPROVED	DESIGN
			DRAWN
			CHECKED
			APPROVED BY
			CITY ENGINEER
			DATE 10/8/91

CITY OF MILPITAS
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION
STANDARD DRAWING

COMMERCIAL
SIDEWALK

NO. 426

ADOPTED
C# 2560
DATE 1-21-75
SHEET 1 OF 1